

DATASHEET

Name:
Type:
Designed by:

PURO SPARKLE
Pendant Light
Lucie Koldova



DESCRIPTION



The endless variability of the Puro collection designed by Lucie Koldova has given rise to the new suspension light called Sparkle. This amazing lighting object shines with noble yet minimalistic geometry and constitutes the centrepiece of any space. The multiple tubes of matt opal or smoke grey glass radiate outward in diffuse light for a magical interior ambience and dynamic.

TECH. DESCRIPTION

Puro Sparkle comprises twelve Puro light tubes arranged in a three-dimensional star formation. The tubes are suspended from the outside by wire ropes anchored directly to the ceiling and from the inside by the power cable, which is secured in the central ceiling canopy. The ceiling canopy also houses the electronics, which are accessible through a service door in the side of the canopy. The tubes are wired to the power cable with special BROKIS connectors.




CERTIFICATES

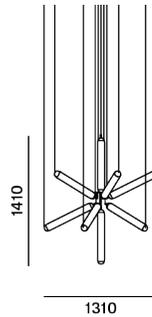

Product ID: PC1153

Puro Sparkle 600

30.5 kg
Glass, metal
max. 6,000 mm
Ceiling
Indoor



Product ID: PC1154

Puro Sparkle 800

36.5 kg
Glass, metal
max. 6,000 mm
Ceiling
Indoor

CONSTRUCTION SPECIFICATIONS

Weight:
Construction material:
Cord Length:
Mounting:
Environment:

ELECTRICAL SPECIFICATIONS

Input voltage [V]: 100 - 240 V
Frequency [Hz]: 50-60 Hz
Max. power [W]: 156 W
Coverage IP: 20
Socket: -
Light source: non-user replaceable LED module
Energy class: E

Input voltage [V]: 100 - 240 V
Frequency [Hz]: 50-60 Hz
Max. power [W]: 216 W
Coverage IP: 20
Socket: -
Light source: non-user replaceable LED module
Energy class: E





DATASHEET

Name:
Type:
Designed by:

PURO SPARKLE
Pendant Light
Lucie Koldova



CERTIFICATES



Product ID: PC1055

CONSTRUCTION SPECIFICATIONS

Weight:
Construction material:
Cord Length:
Mounting:
Environment:

Puro Sparkle 1000

51 kg
Glass, metal
max. 6,000 mm
Ceiling
Indoor

ELECTRICAL SPECIFICATIONS

Input voltage [V]:
Frequency [Hz]:
Max. power [W]:
Coverage IP:
Socket:
Light source:
Energy class:

100 - 240 V
50-60 Hz
300 W
20
-
non-user replaceable LED module
E

LED SOURCE - PURO SPARKLE	600	800	1000
Socket	-	-	-
Type	LED Module	LED Module	LED Module
Lamp wattage [W]	13W	18W	23W
Input voltage [V]	24 VDC	24 VDC	24 VDC
Energy class	E	E	E
Flux [lm]	1105lm 1224lm 1309lm	1495lm 1656lm 1771lm	1917lm 2124lm 2271lm
Light Colour [K]	2700 K 4000 K 5000K	2700 K 4000 K 5000K	2700 K 4000 K 5000K
CRI	80+	80+	80+
Lifespan [h]	20,000 hr	20,000 hr	20,000 hr
Dimmable	yes	yes	yes
Dimensions h x w [mm]			



DATASHEET


Name:
Type:
Designed by:

PURO SPARKLE
Pendant Light
Lucie Koldova




CEILING CANOPY


Dimensions \varnothing x w [in/mm] 16" x 3" / 400 x 70 mm
Weight [kg] 3.5 kg
Material metal

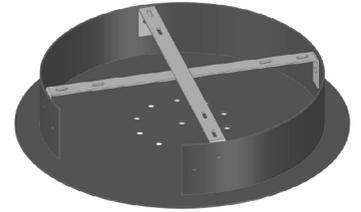

Drawing

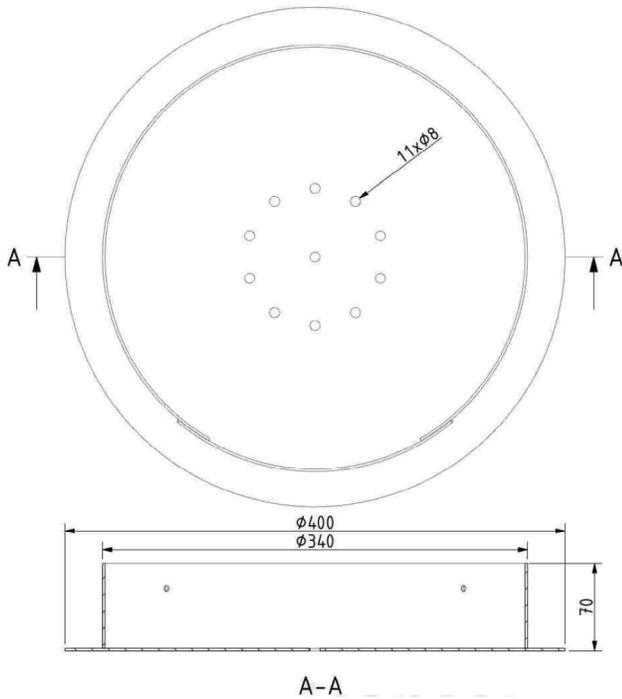

Hole Placement

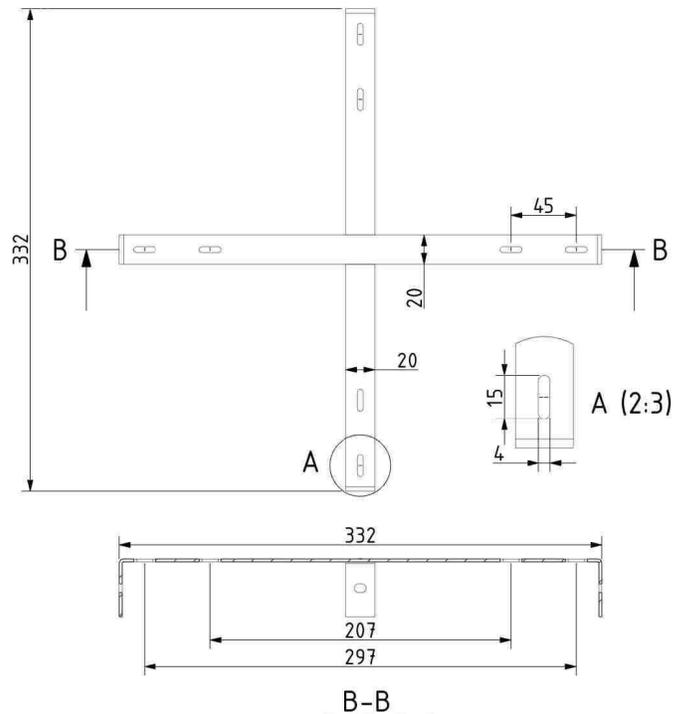

DATASHEET

Name:
Type:
Designed by:

PURO SPARKLE
Pendant Light
Lucie Koldova



PRODUCT DETAILS

Glass Colour

Triplex opal	A	CGC39
Dark grey-opaline	B	CGC1507

Glass Surface

Acid-etched both side surface	A	CGSU881
-------------------------------	---	---------

Body Finish

Metal - black matte powder coating	A	CCS846
Metal - white matte powder coating	A	CCS845

Canopy finish

Trimless - cable version - white structure	A	CCSC2903
Trimless - cable version - black structure	A	CCSC2904

Cable colour

Textile cable - Black	A	CECL519
Textile cable - white	A	CECL521

LED Source

600mm, 24V, LED, 13W, 2700K, 1105lm, RA90, DIM	A	LEDS1926
600mm, 24V, LED, 13W, 4000K, 1220lm, RA90, DIM	A	LEDS1927
600mm, 24V, LED, 13W, 5000K, 1300lm, RA90, DIM	A	LEDS1928
800mm, 24V, LED, 18W, 2700K, 1530lm, RA90, DIM	A	LEDS1929
800mm, 24V, LED, 18W, 4000K, 1695lm, RA90, DIM	A	LEDS1930
800mm, 24V, LED, 18W, 5000K, 1810lm, RA90, DIM	A	LEDS1931
1000mm, 24V, LED, 25W, 2700K, 1910lm, RA90, DIM	A	LEDS1932
1000mm, 24V, LED, 25W, 4000K, 2115lm, RA90, DIM	A	LEDS1933
1000mm, 24V, LED, 25W, 5000K, 2260lm, RA90, DIM	A	LEDS1934

