

DATASHEET

Name:
Type:
Designed by:

PURO CONTOUR
Pendant Light
Lucie Koldova



DESCRIPTION



Puro is a boldly minimalistic variation on the atmospheric pendent light. Inspiration for the collection and its name comes from the Spanish word for cigar 'puro', which also alludes to the clean lines of the composition.

TECH. DESCRIPTION

The light comprises a glass tube, LED source, and dural end caps for a compact visage. The assembly is attached to the ceiling canopy by means of the power cord fitted with a Brokis connector.



CERTIFICATES

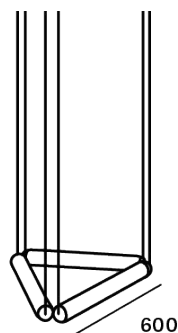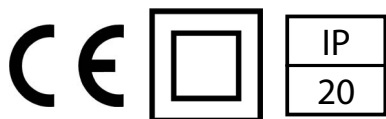


Product ID: PC1133

Puro Contour Triangle 600

kg
Glass, metal
2,000 mm
Ceiling
Indoor

100 - 240 V
50-60 Hz
13 W
20

-
non-user replaceable LED module
A+

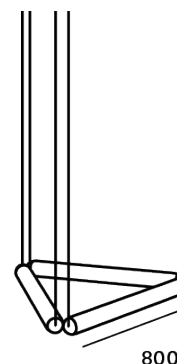

Product ID: PC1118

Puro Contour Triangle 800

kg
Glass, metal
2,000 mm
Ceiling
Indoor

100 - 240 V
50-60 Hz
18 W
20

-
non-user replaceable LED module
A+



AM STUDIO CUSTOM LIGHTING INC | 80 KINCORT ST. TORONTO M6M 5G1 | 416 783 4100
INFO@AMSTUDIO.CA | AMSTUDIO.CA



DATASHEET

Name:
Type:
Designed by:

PURO CONTOUR
Pendant Light
Lucie Koldova




CERTIFICATES



Product ID: PC1057

Puro Contour Square 600

kg
Glass, metal
2,000 mm
Ceiling
Indoor



Product ID: PC1173

Puro Contour Square 800

kg
Glass, metal
2,000 mm
Ceiling
Indoor

CONSTRUCTION SPECIFICATIONS

Weight:
Construction material:
Cord Length:
Mounting:
Environment:

ELECTRICAL SPECIFICATIONS

Input voltage [V]:
Frequency [Hz]:
Max. power [W]:
Coverage IP:
Socket:
Light source:
Energy class:

100 - 240 V
50-60 Hz
13 W
20
-
non-user replaceable LED module
A+

100 - 240 V
50-60 Hz
18W
20
-
non-user replaceable LED module
A+

LED SOURCE - PURO CONTOUR

Socket
Type
Lamp wattage [W]
Input voltage [V]
Energy class
Flux [lm]
Light colour [K]
CRI
Lifespan [h]
Dimmable
Dimensions h x w [mm]

-
LED module
13 W
24 VDC
A+
1105lm | 1220lm | 1300lm
2700K | 4000K | 5000K
80+
20,000 hr
yes
-

-
LED module
18 W
24 VDC
A+
1530lm | 1695lm | 1810lm
2700K | 4000K | 5000K
80+
20,000 hr
yes
-



AM STUDIO CUSTOM LIGHTING INC | 80 KINCORT ST. TORONTO M6M 5G1 | 416 783 4100
INFO@AMSTUDIO.CA | AMSTUDIO.CA




DATASHEET

Name:
Type:
Designed by:

PURO CONTOUR
Pendant Light
Lucie Koldova



CERTIFICATES



Product ID: PC1135

Product ID: PC1119

CONSTRUCTION SPECIFICATIONS

Weight:
Construction material:
Cord Length:
Mounting:
Environment:

Puro Contour Pentagon 600

kg
Glass, metal
2,000 mm
Ceiling
Indoor

Puro Contour Pentagon 800

kg
Glass, metal
2,000 mm
Ceiling
Indoor

ELECTRICAL SPECIFICATIONS

Input voltage [V]:
Frequency [Hz]:
Max. power [W]:
Coverage IP:
Socket:
Light source:
Energy class:

100 - 240 V
50-60 Hz
13 W
20

-
non-user replaceable LED module
A+

100 - 240 V
50-60 Hz
18 W
20

-
non-user replaceable LED module
A+

LED SOURCE - PURO CONTOUR

Socket
Type
Lamp wattage [W]
Input voltage [V]
Energy class
Flux [lm]
Light colour [K]
CRI
Lifespan [h]
Dimmable
Dimensions h x w [mm]

-
LED module
13 W
24 VDC
A+
1105lm | 1220lm | 1300lm
2700K | 4000K | 5000K
80+
20,000 hr
yes
-

-
LED module
18 W
24 VDC
A+
1530lm | 1695lm | 1810lm
2700K | 4000K | 5000K
80+
20,000 hr
yes
-



AM STUDIO CUSTOM LIGHTING INC | 80 KINCORT ST. TORONTO M6M 5G1 | 416 783 4100
INFO@AMSTUDIO.CA | AMSTUDIO.CA



DATASHEET

Name:
Type:
Designed by:


PURO CONTOUR
Pendant Light
Lucie Koldova



CERTIFICATES

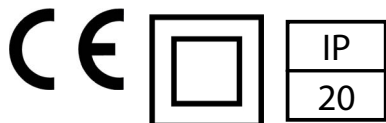

600



800

Product ID: PC1137

Product ID: PC1120

CONSTRUCTION SPECIFICATIONS

Weight:
Construction material:
Cord Length:
Mounting:
Environment:

Puro Contour Hexagon 600

kg
Glass, metal
2,000 mm
Ceiling
Indoor

Puro Contour Hexagon 800

kg
Glass, metal
2,000 mm
Ceiling
Indoor

ELECTRICAL SPECIFICATIONS

Input voltage [V]:
Frequency [Hz]:
Max. power [W]:
Coverage IP:
Socket:
Light source:
Energy class:

100 - 240 V
50-60 Hz
13 W
20
-
non-user replaceable LED module
A+

100 - 240 V
50-60 Hz
18 W
20
-
non-user replaceable LED module
A+

LED SOURCE - PURO CONTOUR

Socket
Type
Lamp wattage [W]
Input voltage [V]
Energy class
Flux [lm]
Light colour [K]
CRI
Lifespan [h]
Dimmable
Dimensions h x w [mm]

-
LED module
13 W
24 VDC
A+
1105lm | 1220lm | 1300lm
2700K | 4000K | 5000K
80+
20,000 hr
yes
-

-
LED module
18 W
24 VDC
A+
1530lm | 1695lm | 1810lm
2700K
80+
20,000 hr
yes
-



AM STUDIO CUSTOM LIGHTING INC | 80 KINCORT ST. TORONTO M6M 5G1 | 416 783 4100
INFO@AMSTUDIO.CA | AMSTUDIO.CA

DATASHEET

Name:
Type:
Designed by:

PURO CONTOUR
Pendant Light
Lucie Koldova



PRODUCT DETAILS

Glass Colour

Triplex opal	A	CGC39
Dark Grey - opaline	B	CGC1507

Glass Surface

Acid - etched both side surface	A	CGCU881
---------------------------------	---	---------

Body Finish

Metal - black matte powder coating	A	CCS846
Metal - white matte powder coating	A	CCS845

Canopy Finish

Metal - black matte powder coating	A	CCSC619
Metal - white matte powder coating	A	CCSC618

Connection method

BROKIS connector 24V	A	CCM1019
----------------------	---	---------

Cable Colour

Textile cable - black	A	CECL519
Textile cable - white	A	CECL521

LED Source

600mm - 24V, LED, 13W, 2700K, 1105lm, RA90+, DIM	A	LEDS1926
600mm - 24V, LED, 13W, 4000K, 1220lm, RA90+, DIM	A	LEDS1927
600mm - 24V, LED, 13W, 5000K, 1300lm, RA90+, DIM	A	LEDS1928
800mm - 24V, LED, 18W, 2700K, 1530lm, RA90+, DIM	A	LEDS1929
800mm - 24V, LED, 18W, 4000K, 1695lm, RA90+, DIM	A	LEDS1930
800mm - 24V, LED, 18W, 5000K, 1810lm, RA90+, DIM	A	LEDS1931