

DATASHEET

Name:
Type:
Designed by:

MONA
Pendant Light
Lucie Koldova



DESCRIPTION




The collection is a showcase of original design and refined combinations of materials, such as glass, metal, and leather. It features a tubular LED light source with a range of colour temperatures to choose from.

TECH. DESCRIPTION

The light comprises a glass shade, leather suspension straps, and tubular LED module with triplex opal glass diffuser. The LED module uses a Brokis connector. The entire assembly is secured with dural endcaps. The light is hung from a ceiling canopy, which also houses the electronics and terminal connectors.



CERTIFICATES

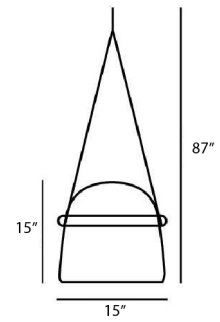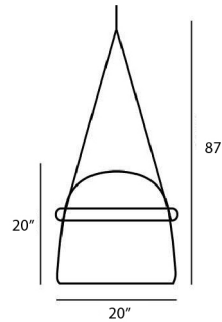

Product ID: PC1030

Mona LX

15.5 kg
Glass, metal, leather
2,200 mm
Ceiling
Indoor

Product ID: PC938

Mona L

9 kg
Glass, metal, leather
2,200 mm
Ceiling
Indoor

CONSTRUCTION SPECIFICATIONS

Weight:
Construction material:
Cord Length:
Mounting:
Environment:



ELECTRICAL SPECIFICATIONS

Input voltage [V]:
Frequency [Hz]:
Max. power [W]:
Coverage IP:
Socket:
Light source:
Energy class:

100 - 240 V
50-60 Hz
12.5 W
20
non-user replaceable LED module
-
A+

100 - 240 V
50-60 Hz
8 W
20
non-user replaceable LED module
-
A+

CERTIFICATES

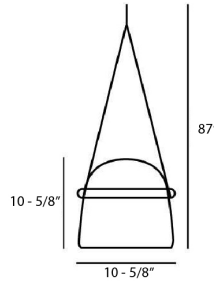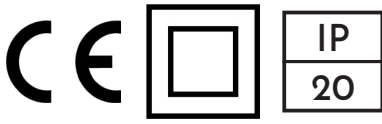

Product ID: PC979

CONSTRUCTION SPECIFICATIONS

Weight:

Construction material:

Cord Length:

Mounting:

Environment:

Mona M

6 kg

Glass, metal, leather

2,200 mm

Ceiling

Indoor

ELECTRICAL SPECIFICATIONS

Input voltage [V]:

100 - 240 V

Frequency [Hz]:

50-60 Hz

Max. power [W]:

4.5 W

Coverage IP:

20

Socket:

non-user replaceable LED module

Light source:

-

Energy class:

A+

LED SOURCE - MONA XL

Type

LED module

Lamp wattage [W]

12.5 W

Input voltage [V]

24 VDC

Energy class

A+

Flux [lm]

915 lm

Light colour [K]

2700K

CRI

80+

Lifespan [h]

2,0000 hr

Dimmable

yes



Product ID: CP10301

LED SOURCE - MONA L

Type

LED module

Lamp wattage [W]

8 W

Input voltage [V]

24 VDC

Energy class

A+

Flux [lm]

580 lm

Light colour [K]

2700K

CRI

80+

Lifespan [h]

2,0000 hr

Dimmable

yes (PWM)




Product ID: CP10295

LED SOURCE - MONA M


Type	LED module
Lamp wattage [W]	4.5 W
Input voltage [V]	24 VDC
Energy class	A+
Flux [lm]	> 330 lm
Light colour [K]	2700/ 4000/ 5000K
CRI	80+
Lifespan [h]	2,0000 hr
Dimmable	yes (PWM)

CEILING CANOPY


Dimensions \varnothing x w [in/mm]	11" x 2" / 280 x 50 mm
Weight [kg]	1.6 kg
Material	metal

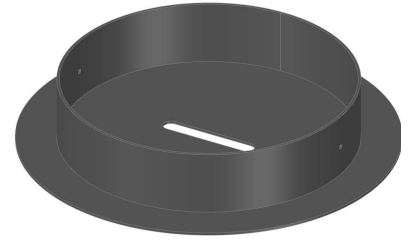

Drawing

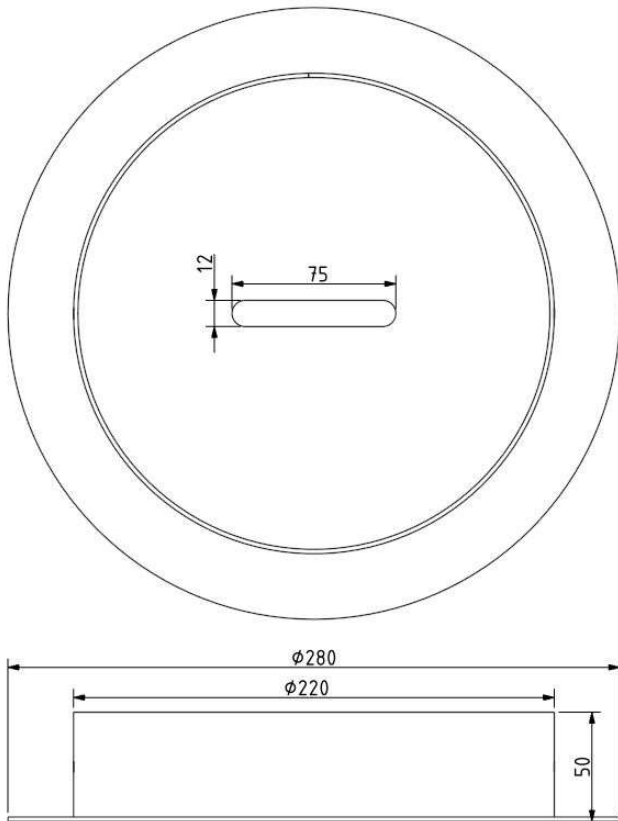

Canopy bracket

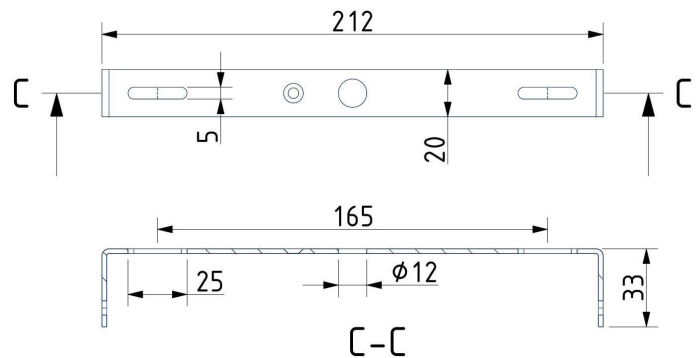

PRODUCT DETAILS

Glass Colour

Transparent glass	CGC23
Smoke grey - transparent glass	CGC516
Opaline - transparent glass	CGC38
Black - transparent glass	CGC601
Violet - transparent glass	CGC554

Glass Surface

Glossy Finish	CGSU66
---------------	--------

Body Finishes

Silver anodized	CCS1917
Black anodized	CCS1948
Iron - White matte powder coating	CCS845

Canopy Finishes

Iron - Black matte powder coating	CCSC619
Iron - White matte powder coating	CCSC618

Straps

Leather straps - Black	GINT792
Leather straps - Natural	GINT788
Leather straps - Grey	GINT758
Leather straps - Dark brown	GINT793

Connection method

Brokis connector	CCM1019
------------------	---------

LED Source

24V, LED, 12.5W, 2700K, 740lm, DIM	LEDS1922
24V, LED, 12.5W, 4000K, 909lm, DIM	LEDS2149
24V, LED, 12.5W, 5000K, 962lm, DIM	LEDS2150

Dimmable version

Non-dimmable version	CEDV1457
RF system - remote control version	CEDV1461
PWM Single	CEDV1459
1-10V	CEDV1460
DALI version	CEDV1458
AC phase-out	CEDV1730