

# DATASHEET

Name:  
Type:  
Designed by:

**FLAT**  
Pendant Light  
Ichiro Iwasaki

VIBIA

## DESCRIPTION



The Flat Pendants are expressed as metal planes placed at different heights. They reflect the light from their surfaces, projecting an enveloping luminance. Hanging from a cable from the ceiling the pendant light fittings are both delicate yet strikingly graphic appearing to float overhead.

## TECH. DESCRIPTION

Installation type: Surface mounted  
Light Distribution: Indirect Lighting.  
Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.




## CERTIFICATES

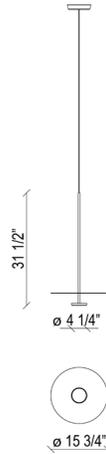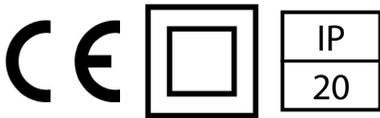

Product ID: 5935

### Flat Ø15 3/4"

-  
Aluminum, Steel, Polycarbonate difusser  
max. 157 inches  
Pendant  
Indoor

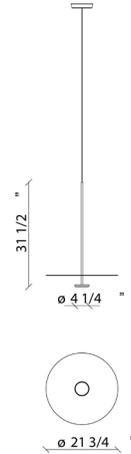

Product ID: 5940

### Skän Ø21 3/4"

-  
Aluminum, Steel, Polycarbonate difusser  
max. 157 inches  
Pendant  
Indoor

## CONSTRUCTION SPECIFICATIONS

Weight:  
Construction material:  
Cord Length:  
Mounting:  
Environment:

## ELECTRICAL SPECIFICATIONS

Input voltage [V]: 100 - 240 V  
Frequency [Hz]: 50-60 Hz  
Max. power [W]: 10.5 W  
Coverage IP: 20  
Socket: -  
Light source: LED Module  
Energy class: A+

100 - 240 V  
50-60 Hz  
10.5W  
20  
-  
LED Module  
A+



# DATASHEET

Name: **FLAT**  
Type: Pendant Light  
Designed by: Ichiro Iwasaki

VIBIA

## PRODUCT DETAILS

### Item Coding

	Finish	Code
	Off - White (NCS S 1000 - N)	13
	Terra Red (NCS S 4040-Y70R)	37
	Green L1 (NCS S 4005-G80Y)	47

### Light Source

Model	LED	Driver Included	Standard Dimming
5935	2700K CRI 90, 1450lm, 0 lm/W	Constant Current 700 mA 120V-277V 50/60 Hz	0-10V
5940	2700K CRI 90, 1450lm, 138.09m/W	Constant Current 700 mA 120V-277V 50/60 Hz	0-10V