

*DESIGNER: Arik Levy*

YEAR OF DESIGN: 2014

Glass: Hand Blown Bohemian Crystal Glass

Not from the Stone Age but closer to Kryptonite, Crystal Rock appears in the cave of the future as an ambassador of the fusion between nature and man, light and reflection transparency and mass.



## PACKAGING

### Crystal rock single

Size: 340 × 220 × 200 mm

Total weight: 5 kg

Pallet 1200 × 800 × 1200 mm: 60 pcs

### Crystal rock 3

Size: 460 × 320 × 200 mm

Total weight: 9 kg

Pallet 1200 × 800 × 1200 mm: 25 pcs

### Crystal rock 5

Size: 550 × 420 × 200 mm


Total weight: 15 kg

Pallet 1200 × 800 × 1200 mm:

20 pcs


## TECHNICAL DETAILS C.R SINGLE PENDANT RAW

Type	CE	UL
Light Source	G4 LED, 2W 2700K Lm 200 CRI 80 NO dimmable	G4 LED, 2,5W 2700K Lm 230 CRI 80 NO dimmable
Input voltage	230VAC, 50Hz	100-120V AC, 50/60 HZ
Rated Power	2W	2,3W
Ballast	Trailing edge	
Cord Color	Coaxial cable 2 x 0,75 mm 2 silicone, braiding tinned	
Cord Length	2500mm/ 98 ½" adjustable	
Canopy color	White matt	
Prot. rating	IP 20	
Safety class	CLASS I	

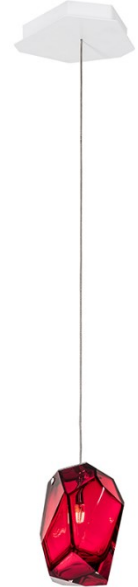

## TECHNICAL DETAILS C.R 3 RAW


Type	CE	UL
Light Source	G4 LED, 2W 2700K Lm 200 CRI 80 dimmable	G4 LED, 2,5W 2700K Lm 230 CRI 80 dimmable
Input voltage	230VAC	100-120V AC, 50/60 HZ
Rated Power	6W	7,5W
Ballast	Trailing edge	
Cord Color	Coaxial cable 2 x 0,75 mm 2 silicone, braiding tinned	
Cord Length	2500mm/ 98 ½" adjustable	
Canopy color	White matt	
Prot. rating	IP 20	
Safety class	CLASS I	

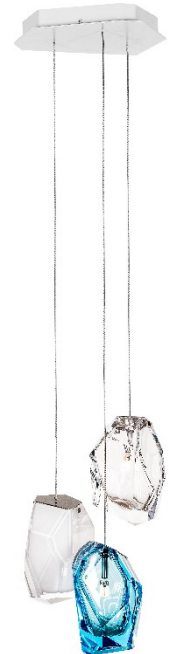

## TECHNICAL DETAILS C.R 5 RAW

Type	CE	UL
Light Source	5x G4 LED, 2W 2700K Lm 200 CRI 80 dimmmable	5x G4 LED, 2,5W 2700K Lm 230 CRI 80 dimmmable
Input voltage	230VAC	100-120V AC, 50/60 HZ
Rated Power	10W	12,5W
Ballast	Trailing edge	
Cord Color	Coaxial cable 2 x 0,75 mm 2 silicone, braiding tinned	
Cord Length	2500mm/ 98 ½" adjustable	
Canopy color	White matt	
Prot. rating	IP 20	
Safety class	CLASS I	



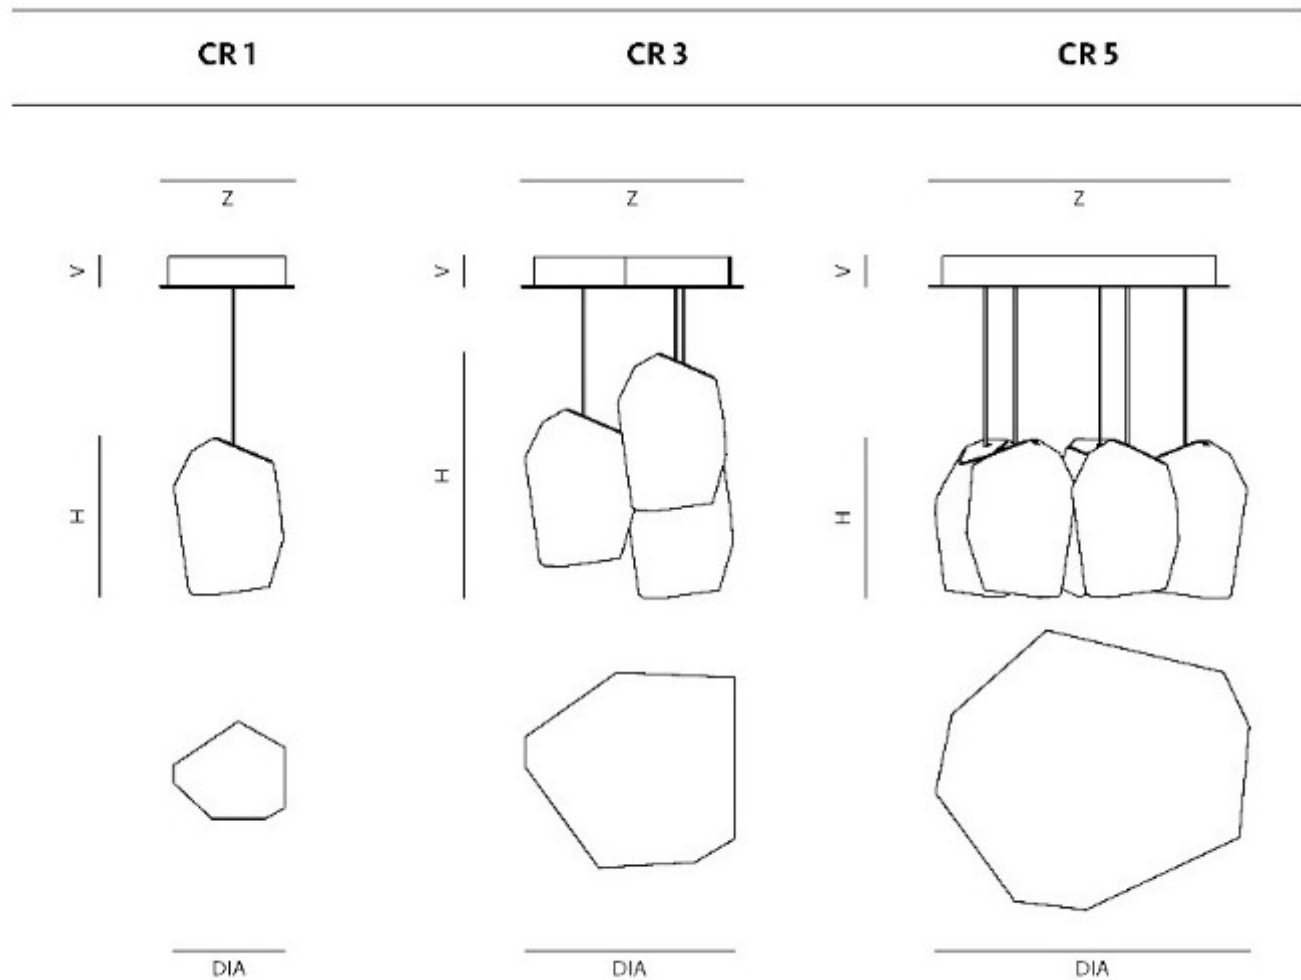

NAME	W/Dia (mm/inch)	H(mm/inch)	Dia ( mm/inch)	V (mm/inch)
CR 1	130/5 1/8"	180/7 1/16"	177/7" x 157/6 3/16"	36/1 7/16"
CR 3	260/ 10 1/4"	180/ 7 1/16"	260/ 10 1/4" x 240 /9 7/16"	36/ 1 7/16"
CR 5	360/ 14 3/16"	180/ 7 1/16"	357/ 14 1/16" x 313/ 12 5/16"	36/ 1 7/16"