

CIPHER SCONCE & FLOOR LAMP


PRODUCT SPECIFICATION

DESIGNER: Yabu Pushelberg

YEAR OF DESIGN: 2017

Glass: Hand Blown Technical Glass

Inspired by the versatility and texture of surface-patterning and the way in which it catches light, the delicate hand-blown crystal cylindrical pieces are cut with clean, clear lines. With components arranged in series and joined by polished champagne-gold finished connections that emit light, Cipher's overall linear form creates a poetic visual rhythm. Regardless of the configuration, there exists an inherent simplicity and earnestness in the effect of light playing off these delicate, perfectly etched glass cylinder

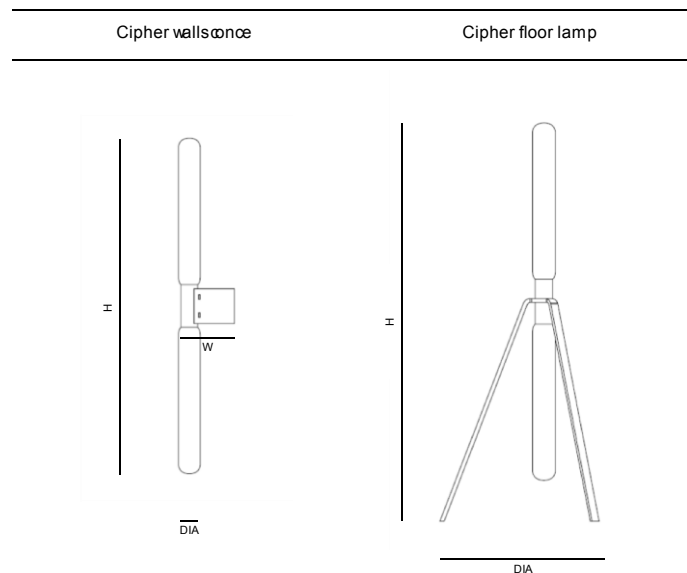

| NAME | W/Dia (mm/inch) | H(mm/inch) | Dia (mm/inch) | V (mm/inch) |
|--------------------|----------------------------|----------------|----------------|-------------|
| Cipher Wall Sconce | 154 6/8" Dia 60/ 2 3/8" | 919/ 36 1/4" | - | - |
| Cipher Floor Lamp | Dia 535/21 1/16" | 1027/ 40 9/16" | - | - |

CIPHER SCONCE & FLOOR LAMP

PRODUCT SPECIFICATION

TECHNICAL DETAILS C. WALLSCONCE

| Type | CE | UL |
|------------------|--|--------------------------|
| Light source | 2X LED module, 2W, 2850-3000K CRI 90 Dimmable | |
| Input voltage | 220-240 VAC, 50/60HZ | 100-120V AC, 50/60 HZ |
| | 4W | |
| Ballast | trailing edge | |
| Primary material | stainless steel, titanium champagne coating | |
| Prot. rating | IP 20 | |
| Safety class | CLASS I | |



TECHNICAL DETAILS C. FLOOR LAMP

| Type | CE | UL |
|------------------|--|--------------------------|
| Light source | 2X LED module, 2W, 2850-3000K CRI 90 Dimmable | |
| Input voltage | 220-240 VAC, 50/60HZ | 100-120V AC, 50/60 HZ |
| Rated Power | 3W | |
| Ballast | NON-Dimmable | |
| Primary material | stainless steel, titanium champagne coating | |
| Cord Color | Coaxial cable 2 x 0,75 mm 2 silicone, braiding tinned | |
| Cord Length | 3500/137 13/16" | |
| Prot. rating | IP 20 | |
| Safety class | CLASS I | |

