


DESIGNER: Yabu Pushelberg

YEAR OF DESIGN: 2017

Glass: Hand Blown Technical Glass

Inspired by the versatility and texture of surface-patterning and the way in which it catches light, the delicate hand-blown crystal cylindrical pieces are cut with clean, clear lines. With components arranged in series and joined by polished champagne-gold finished connections that emit light, Cipher's overall linear form creates a poetic visual rhythm. Regardless of the configuration, there exists an inherent simplicity and earnestness in the effect of light playing off these delicate, perfectly etched glass cylinder

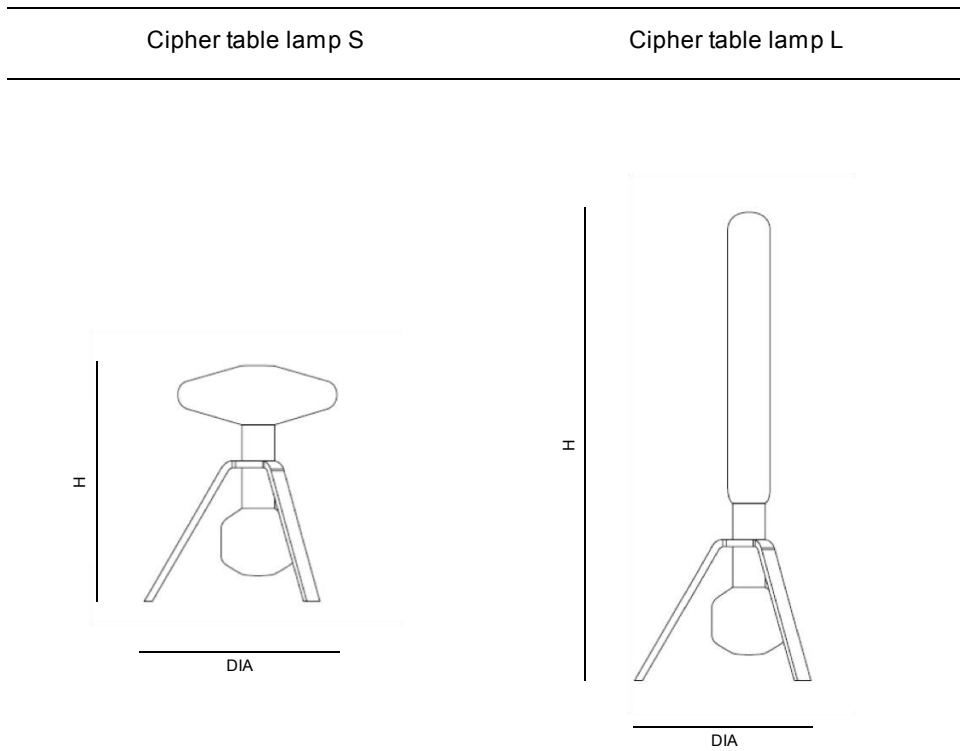

| NAME | Dia (mm/inch) | H(mm/inch) | Dia (mm/inch) | V (mm/inch) |
|---------------------|---------------|--------------|----------------|-------------|
| Cipher Table Lamp S | 314/12 3/16" | 326/13" | - | - |
| Cipher Table Lamp L | 314/12 3/16" | 646/25 9/16" | - | - |

TECHNICAL DETAILS C. TABLE LAMP S

| Type | CE | UL |
|------------------|---|-----------------------|
| Light source | 2x LED module, 1.5 W, 2850-3000 K CRI 90 Dimmable | |
| Input voltage | 220-240 VAC, 50/60HZ | 100-120V AC, 50/60 HZ |
| Rated Power | 3W | |
| Ballast | NON-Dimmable | |
| Primary material | stainless steel, titanium champagne coating | |
| Cord Color | Coaxial cable 2 x 0,75 mm 2 silicone, braiding tinned | |
| Cord Length | 2500mm/ 98 7/16" | |
| Prot. rating | IP 20 | |
| Safety class | CLASS I | |



TECHNICAL DETAILS C. TABLE LAMP L

| Type | CE | UL |
|------------------|---|-----------------------|
| Light source | 2x LED module, 1.5 W, 2850-3000 K CRI 90 Dimmable | |
| Input voltage | 220-240 VAC, 50/60HZ | 100-120V AC, 50/60 HZ |
| Rated Power | 3W | |
| Ballast | NON-Dimmable | |
| Primary material | stainless steel, titanium champagne coating | |
| Cord Color | Coaxial cable 2 x 0,75 mm 2 silicone, braiding tinned | |
| Cord Length | 2500mm/ 98 7/16" | |
| Prot. rating | IP 20 | |
| Safety class | CLASS I | |

