

Funnel

Design by Ramón Benedito.

Reference

2013.

Application

Wall Fixtures

Installation type

Surface mounted

Description

Light for ceiling or wall fitting. It gives an indirect light which is ideal for creating a cozy atmosphere in any room. Non-dazzle.

Diffuser

Polycarbonate diffuser

Materials

Shade: Aluminum
Reflector: Aluminum
Wall plate: Steel


Finishes

 **2013-10** White (NCS S 0300-N)

 **2013-36** Soft Pink (NCS S 1010-Y50R)

 **2013-47** Green L1 (NCS S 4005-G80Y)

Sketch




Electrical characteristics

6 x LED 4.5W 700mA

Total 27.0 W



VIBIA



Light source: 2700K CRI >80 2941 lm 108 lm/W

Fixture: 2336 lm 85 lm/W

Driver included: CC - Constant Current 700 mA 120-277V 50/60Hz

Electronic dimming: 0-10V

Optional dimming: TRIAC

Installation and assembly

Please see the installation manual


Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

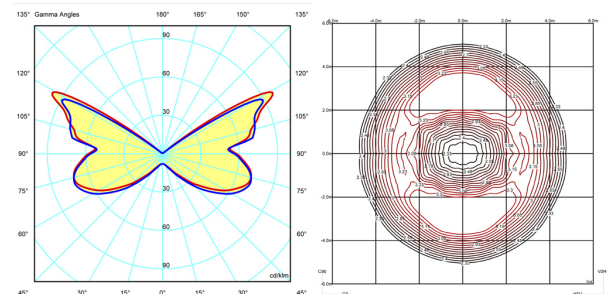

Certificates

