

# Guise

Design by Stefan Diez.

## Reference

**2294.**

## Application

Ceiling Fixtures

## Installation type

Surface mounted

## Description

Ceiling LED lamp. The light is diffused in an almost invisible manner through the glass and only emerges through the striations etched on the surface, diffusing the light as if by magic.

## Diffuser

Borosilicate glass diffuser

## Materials


Canopy: Steel  
Body: Aluminum

## Finishes



**2294-18** Graphite (ADAPTA RF 9913 WX)

## Sketch



## Electrical characteristics

1 x LED STRIP 24V 12W

Total 12.0 W



# VIBIA



**Light source:** 3000K CRI >90 1325 lm 89.08 lm/W

**Driver included:** CV - Constant Voltage 110-240V 50/60Hz

**Electronic dimming:** 1-10V

**Optional dimming:** DALI or Lutron ECO

**Remote dimming:** DALI or Lutron ECO

## Technical characteristics

- The glass is made of borosilicate. It is typical for the glass to have small air bubbles, some inclusions and tiny scratches. These do not affect the quality or the resistance of the glass.


## Installation and assembly

Please see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 100%

Coordinate system : CG

Total flux : 472.92 lm

Maximum value : 196.63 cd


Light position : C=90.00 G=7.50

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

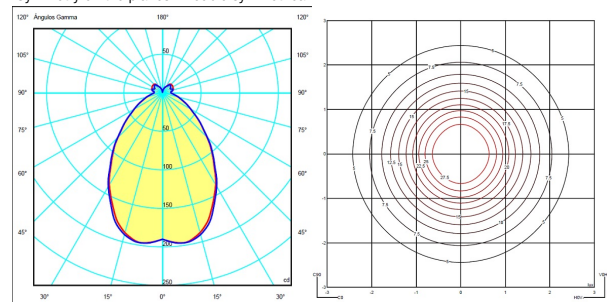

## Certificates

