

# Plus

Design by X. Claramunt and M. de Mas.

# VIBIA

## Reference

**0632.**

## Application

Outdoor

## Installation type

Surface mounted

## Description

Surface-mounted ceiling light, designed by X. Claramunt and M. de Mas. Convex methacrylate diffuser and matte white lacquer finish, though the whole fixture can be painted in the desired color to make it blend perfectly into the ceiling. Its form recalls a real skylight.

## Diffuser

Acrylic diffuser


## Materials

Diffuser: Acrylic  
Body: Polyurethane foam  
Ceiling support: Steel

## Finishes

 **0632-03** White (RAL 9016)


## Sketch



## Electrical characteristics

1 x LED Plate 22.7W 1200 mA

Total 22.7 W

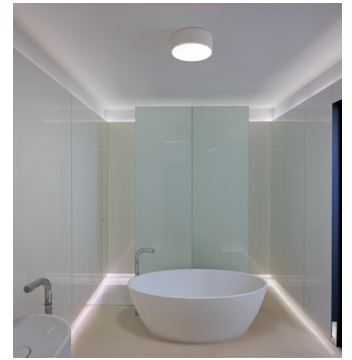

**Light source:** 3500K CRI >90 2420 lm 106 lm/W

**Fixture:** 1102 lm 48 lm/W

**Driver included:** CC - Constant Current 1200 mA 120~277V 50/60Hz

**Electronic dimming:** 0-10V

**Optional dimming:** DALI or Lutron ECO

## Technical characteristics

- Surface Mounted


## Installation and assembly

Please see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 41.36 lm/W

Coordinate system : CG

Total flux : 1102.01 lm

Maximum value : 379.64 cd


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

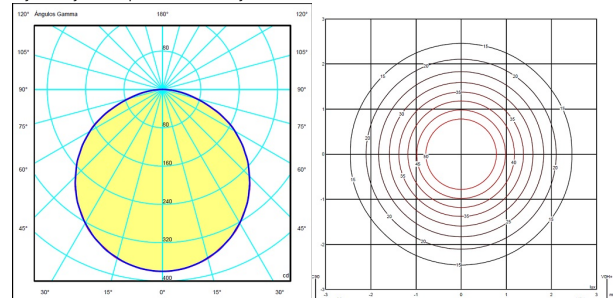

## Certificates

