

# Puck Wall Art

Design by Jordi Vilardell.

## Reference

**5491.**

## Application

Wall Fixtures

## Installation type

Surface mounted

## Description

Wall sconce combines three discs via a single electrical connection. Available in two different lacquered aluminum finishes

## Diffuser

Polycarbonate diffuser

## Materials

Body: ABS

Wall support: Aluminum

## Finishes




**5491-72** Grey D1 & Grey L2 (NCS S 7000-N & NCS S 2500-N)



**5491-73** Brown M1 & Grey D1 (NCS S 4020-Y60R & NCS S 7000-N)

## Sketch




## Electrical characteristics

3 x LED STRIP 12.6W 700mA

Total 37.8 W



# VIBIA

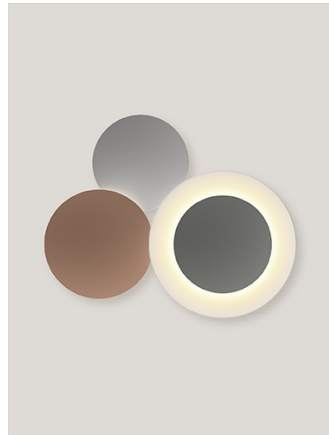

**Light source:** 2700K CRI >90 4307.8 lm 113.96 lm/W

**Fixture:** 1200.84 lm 27.03 lm/W

**Driver included:** CC - Constant Current 700 mA 120~277V 50/60Hz

**Electronic dimming:** 0-10V

**Optional dimming:** DALI or Lutron ECO

## Technical characteristics

- Puck Wall Art: a maximum of 8 modules can be connected to a single junction box.


## Installation and assembly

Please see the installation manual

## Light distribution

### Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



## Photometric data

Efficiency : 27.03 lm/W

Coordinate system : CG

Total flux : 1200.84 lm

Maximum value : 242.02 cd

Light position : C=0.00 G=0.00

Symmetry on the planes : Asymmetric

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

## Certificates

