

# Structural

Design by Arik Levy.

## Reference

**2610.**

## Application

Wall Fixtures

## Installation type

Surface mounted

## Description

Wall light that marks coordinates with a rectilinear language connects points of light in space, relates planes, and underlines the architectural dimension. Indirect lighting and composition based on volumes clarify light and shade.

## Diffuser

Polycarbonate diffuser

## Materials

Body: Aluminum  
Diffuser: Polycarbonate  
Profile: Aluminum

## Finishes




**2610-15** Grey L2 (NCS S 2500-N)



**2610-21** Grey D1 (NCS S 7000-N)

## Sketch



## Electrical characteristics

2 x LED PLATE 24V 6W

150°  
120°  
90°  
60°  
30°  
0°  
30°  
60°  
90°  
120°  
150°

Total 12.0 W

A

# VIBIA



**Light source:** 3000K CRI >90 1416 lm 118 lm/W

**Driver included:** CV - Constant Voltage 110-277V 50/60Hz

**Electronic dimming:** 0-10V

**Optional dimming:** DALI

**Remote dimming:** DALI or Lutron ECO

## Technical characteristics

- Only one main input by square box 16x16cm.


## Installation and assembly

Please see the installation manual

## Light distribution

### General lighting - opaque shade

Fixture suitable for general ambient illumination, distributing light mainly upward and/or downward.



## Photometric data

Efficiency : 100.00%

Coordinate system : CG

Total flux : 378.81 lm

Maximum value : 438.41 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Asymmetric

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

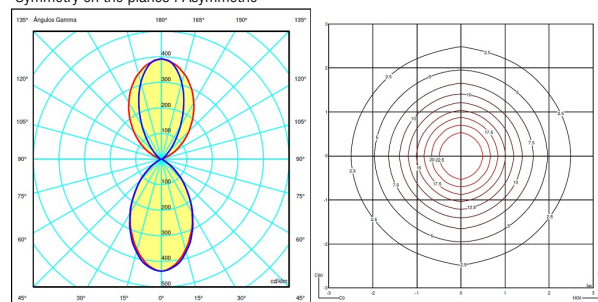

## Certificates

