

Halo

Design by Martin Azua.

Reference

2355.

Application

Pendants

Installation type

Surface mounted

Description

Hanging lamp. Providing an ambient or indirect light through its vertical methacrylate diffuser. The diffuser is supported by a fine grade steel structure. By combining several units of differing heights a more dynamic effect can be achieved for larger spaces.

Diffuser

PMMA diffuser

Materials

Diffuser: Polycarbonate
LED support: Aluminum
Pendant structure: Steel
Canopy: Steel

Finishes




2355-11 Black (NCS S 8500N)



2355-20 Gold finish (Gold)

Sketch




Electrical characteristics

1 x LED STRIP 24V 15,3W

Total 15.3 W



VIBIA

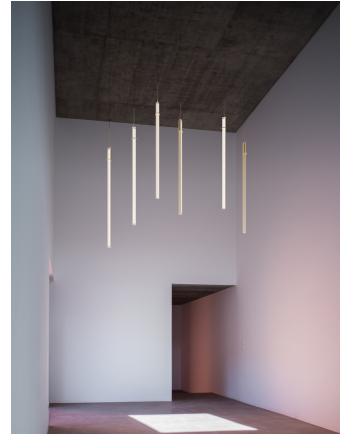

Light source: 3000K CRI >80 1528.04 lm 99.9 lm/W

Fixture: 1157.34 lm 60.84 lm/W

Driver included: CV - Constant Voltage 110-277V 50/60Hz

Electronic dimming: 0-10V

Remote dimming: DALI or Lutron ECO

Technical characteristics

- Surface Mounted


Installation and assembly

Please see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 100 %

Coordinate system : CG

Total flux : 1157.13 lm

Maximum value : 232.74 cd

Light position : C=0.00 G=65.00

Symmetry on the planes : Asymmetric

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

Certificates

